
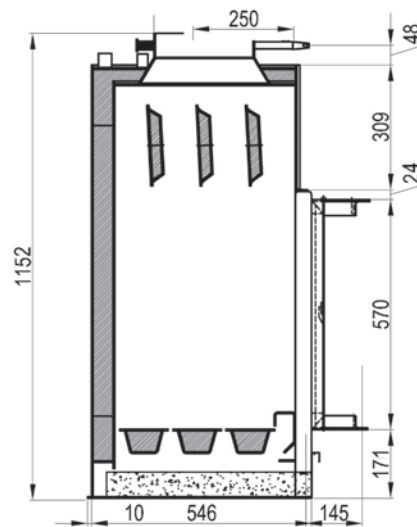


Data sheet KKH 25 with prism/oriel front door

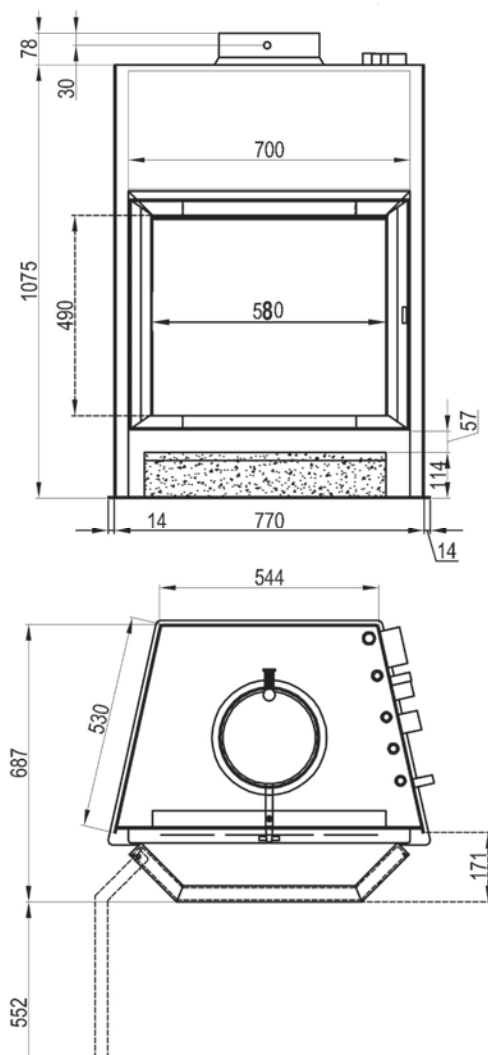

All fire-place boilers are delivered with adjustable feet at a value of 230 mm - 300 mm. (M24)

The indicated technical dimensions are subject to tolerances caused by production.

General German build-up-obvious permission with the number Z-43.11-195.



A product of Normatherm Stahlheizkesselbau Germany.

Water-bearing chimney inserts

| Type | British thermal units | | | | | | |
|-------------------------------------|-----------------------|--------|--------|---------|---------|---------|-------|
| | KKH 15 | KKH 20 | KKH 25 | KKH 30 | KKH 40 | KKH 45 | |
| | 52 BTU | 68 BTU | 85 BTU | 102 BTU | 136 BTU | 152 BTU | |
| Rated output with coal, water-sided | BTU | 61 | 71 | 78 | 102 | 129 | 143 |
| Rated output with wood, water-sided | BTU | 49,1 | 58,9 | 72,9 | 91,0 | 124,7 | 142,5 |
| Radiating power, wood, closed | BTU | 4,1 | 6,5 | 11,2 | 6,8 | 12,9 | 13,6 |
| Watervolume | Liter | 120 | 130 | 140 | 150 | 220 | 245 |
| Heating surface | sq ft | 24,2 | 27,7 | 28,8 | 37,4 | 42,5 | 50,9 |
| weight chimney insert, not packed | lb | 319,6 | 352,7 | 396,8 | 462,9 | 551,1 | 639,3 |